


# Analog Sound Level Meter


 **Check noise level economically**  
With bright, easy-to-read analog display

## Features:

- Tripod mount and 9V battery powered, ideal for field use
- Analog output for connection to chart recorders, dataloggers, etc.
- Selectable weighting ('A' or 'C') and response time (Fast or Slow)
- MAX HOLD front-panel select switch locks highest reading on the display
- Complete with 9V battery
- Two-color, bright analog display with battery check
- Measurement range from 54 to 126 dB in 7 ranges
- Built-in 0.5" Electret Microphone

## Applications:

- Identify noise ordinance violations, traffic noise measurements, community noise measurements, theater acoustic studies, stereo balancing.

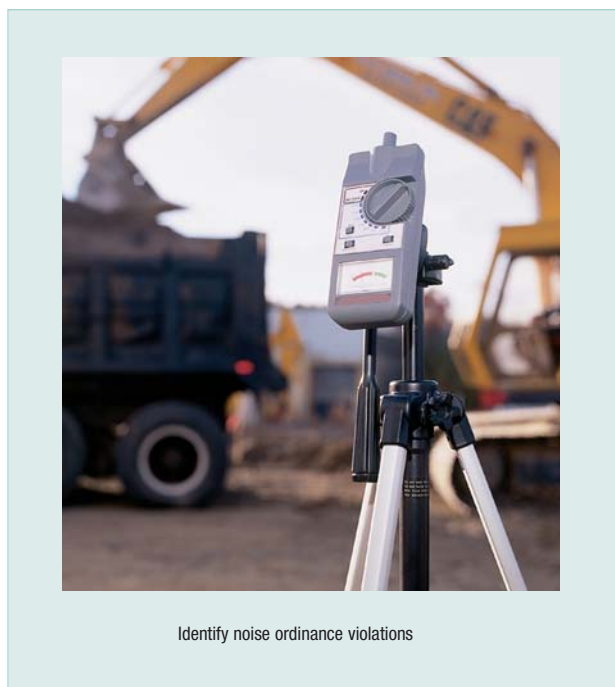

Identify noise ordinance violations

## Specifications

Range	54 to 126 dB
Accuracy	± 2dB @ 94dB, 1000Hz
Weighting	'A' and 'C' (Selectable)
Response time	FAST and SLOW (Selectable)
Microphone	0.5" Electret Condenser type
Analog output	AC: 0.707Vrms
Power Supply	9V Battery
Dimensions	2.7 x 7.1 x 1.4" (68 x 180 x 36mm)
Weight	5.1 oz. (160g)



**GLOBAL CONTROL C.A.**  
Av. Bolivar Norte C.C. Camoruco  
Piso 15 Ofic 15-8 Valencia  
Telf. 0241-8244157 /8212318  
email: [info@globalcontrol.com.ve](mailto:info@globalcontrol.com.ve)  
[www.globalcontrol.com.ve](http://www.globalcontrol.com.ve)

## Ordering Information:

407706 ..... Analog Sound Level Meter  
407706-NIST ..... 407706 with NIST Certificate

