

Portable Indoor Air Quality CO₂ Meter


Measures Carbon Dioxide (CO₂), Temperature, Humidity, Dew Point, and Wet Bulb
And calculates statistical 8 hour and 15 minute time weighted averages

Features:

- Checks for Carbon Dioxide (CO₂) concentrations
- Calculates statistical weighted averages of TWA (8 hour time weighted average) and STEL (15 minute short term exposure limit)
- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Measurement ranges:
CO₂: 0 to 5,000ppm
Temperature: 14 to 140°F (-10 to 60°C)
Humidity: 0.0 to 99.9%
- User programmable audible alarm
- Backlit triple LCD display
- Built-in RS-232 interface for capturing readings on PC
- Data acquisition software and cable included to record and document CO₂, Humidity and Temperature data
- Optional 33% and 75% RH calibration bottles (RH300-CAL)
- Complete with software and cable, 4 AA batteries, and carrying case

Applications:

- Check air quality in schools, office buildings, greenhouses, hospitals and anywhere that high levels of carbon dioxide are generated

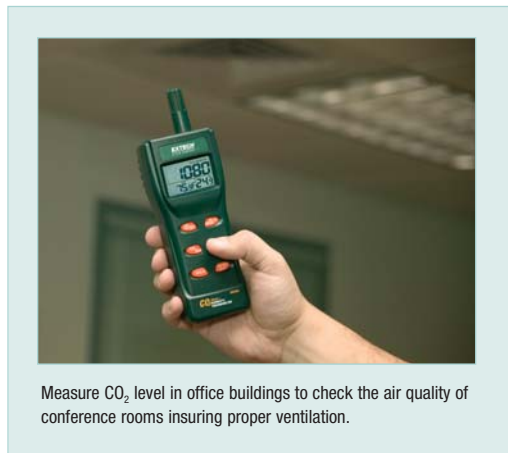

Specifications	Range	Resolution
Carbon Dioxide (CO ₂)	0 to 5,000ppm	1ppm
Temperature	14 to 140°F (-10 to 60°C)	0.1°F/°C
Humidity	0.0 to 99.9%	0.1%
Wet Bulb and Dew Point	Calculated	
Dimensions	7.9x2.7x2.3" (200x70x57mm)	
Weight	6.7 oz. (190g)	

Ordering Information:

C0250Portable Indoor Air Quality CO₂ Meter
RH300-CAL33% and 75% RH Calibration Kit



GLOBAL CONTROL C.A.
Av. Bolivar Norte C.C. Camarucó
Piso 15 Ofic 15-8 Valencia
Telf. 0241-8244157 /8212318
email: info@globalcontrol.com.ve
www.globalcontrol.com.ve

